


Slate Ridge 530 mm

Swisspearl dry fix fibre cement ridges are available in various pitch angles and are coloured to match Swisspearl slates. Manufactured to BS EN 492:2012, in a factory operating ISO 9001 and 14001 quality and environmental management systems.

- Compatible with all fibre cement slate brands
- Lightweight, easy to carry, cut and install
 - Low profile in various angles for unobtrusive skyline
 - Pre-holed for easy and speedy fixing
 - Can be used on hips.

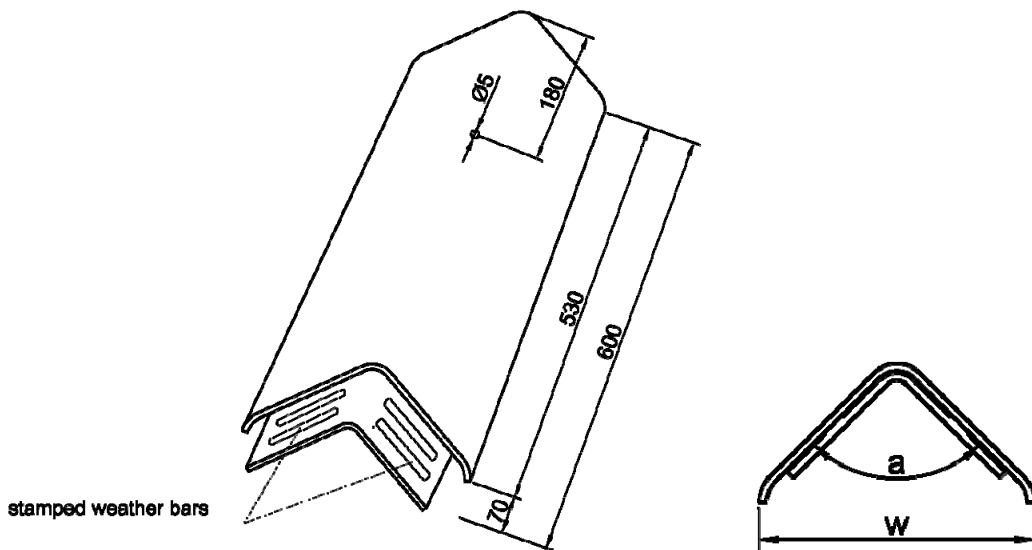

Upstands on wing edges to facilitate close fit to slates and give an aesthetically pleasing look

Weather bars on underlap to prevent rain from penetrating under ridges at joint

| Ridge Angle (a) | Roof Pitch | w (mm) |
|-----------------|------------|--------|
| 75° | 52.5° | 205 |
| 90° | 45° | 225 |
| 105° | 37.5° | 245 |
| 120° | 30° | 265 |
| 135° | 22.5° | 285 |

Pre-holing ridges prevents damage occurring during fixing once care is taken not to over-tighten.

Fixing: 110mm chelated ridge tile nail with a neoprene washer or 110mm Tek screw with a neoprene washer. Ridge tile nails have a flat painted head and are less noticeable due to this low profile. Tek screws can be easily removed to facilitate ridge replacement should damage occur.

www.swisspearl.com

Please visit the local website for contact details and further information.