

# Swisspearl Largo

Version: 6/26

Façade Boards

EN 12467

## Avera | Vintago | Reflex

Avera is a naturally dried, through-coloured fibre-cement panel manufactured using a dynamic production process that gives it an unmistakably natural and authentic texture. The highly resistant transparent coating makes the panels particularly scratch resistant and protects them from heavy soiling and graffiti.

Vintago is a naturally dried fibre-cement panel that features a sanded and slightly rough surface. Through a polishing process using a coarse abrasive grit, the interior and the original character of the fibre-cement board are subtly brought to the surface.

Reflex adds a reflective coating that creates a distinctive light reflection.



### VINTAGO

- transparent High-Resistant Coating
- sanded
- coloured through

VI 061  
VI 021  
VI 040  
VI 050  
VI 100  
VI 011  
VI 091  
VI 001  
VI 071  
VI 031

### AVERA

- transparent High-Resistant Coating
- coloured through

AV 060  
AV 020  
AV 040  
AV 050  
AV 100  
AV 010  
AV 000  
AV 070  
AV 030

### REFLEX

- iridescent, opaque High-Resistant Coating
- coloured through

Granite 4161  
Granite 4162  
Anthracite 4021  
Anthracite 4022  
Jade 4051  
Crystal 4112  
Crystal 4111  
Ivory 4091  
Ivory 4092  
Amber 4071  
Amber 4072  
Coral 4031



# Swisspearl Largo

	Units	6 mm	8 mm	12 mm
<b>Dimension (nominal)</b>				
Thickness	mm	6.0	8.0	12.0
Width	mm	1192 1250	1192 1250	1192 1250
Length	mm	2510 3050	2510 3050	2510 3050
<b>Dimension tolerance (EN 12467, Level 1)</b>				
Thickness (up to 20 mm)	mm	± 0.6	± 0.8	± 1.2
Width (1000 mm < a < 1600 mm)	mm	± 0,3 % a	± 0,3 % a	± 0,3 % a
Length (1600 mm < a)	mm	± 5.0	± 5.0	± 5.0
a is the nominal width or length				
<b>Physical properties</b>				
Density, dry minimum (EN 12467)	Kg/m <sup>3</sup>	≥ 1550	≥ 1550	≥ 1550
Density, dry average (EN 12467)	Kg/m <sup>3</sup>	1800	1800	1800
Weight (average shipping weight)	Kg/m <sup>2</sup>	12.4	16.6	24.8
<b>Mechanical properties</b>				
<b>Bending modulus of elasticity MOE (EN 12467)</b>				
E-module average, ambient	GPa	12.0	12.0	12.0
<b>Bending strength MOR (EN 12467)</b>				
Wet average (EN 12467)	MPa	25.3	25.3	25.3
Minimum Class A4 (EN 12467)	MPa	18.0	18.0	18.0
<b>Color variation measured on the production line</b>				
CIELAB colour model	ΔE	< 2.0	< 2.0	< 2.0
<b>Color Resistance to UV (Xenon Arc light for accelerated weathering) ASTM G155</b>				
3000 hours	ΔE	< 5.0	< 5.0	< 5.0
5000 hours	ΔE	< 5.0	< 5.0	< 5.0
<b>Environmental footprint (EN 15804 ISO 14040/ ISO 14044)</b>				
GWP-total (A1-C4)	kgCO <sub>2</sub> -eq		16,7	
GWP-biogenic (A1-C4)	kgCO <sub>2</sub> -eq		0,74	
GWP-fossil (A1-C4)	kgCO <sub>2</sub> -eq		16,5	

# Swisspearl Largo

	Units	6 mm	8 mm	12 mm
<b>Thermal properties</b>				
Coefficient of thermal expansion $\lambda_{10}$	mm/m °C	0.01	0.01	0.01
Temperature (air) in use	°C max	-40 +80	-40 +80	-40 +80
Frost resistance (100 cycles EN 12467)	RL	RL > 0,75	RL > 0,75	RL > 0,75
Thermal conductivity (ISO 8301, EN 12667) $\lambda_{10}$	W/mK	0.5	0.5	0.5

<b>Hygrothermal properties</b>				
Moisture movement (30/90 % RH, EN 12467)	mm/m	1.5	1.5	1.5
Moisture movement (wet-dry-wet)	mm/m	< 5	< 5	< 5
Moisture content	%	2 - 7	2 - 7	2 - 7

<b>Water vapour transmission properties (ISO 12572)</b>				
Vapour performance	kg/m <sup>2</sup> s Pa	0.19	0.19	0.19
Vapour transmission resistance (Z-value)	GPa m <sup>2</sup> s/kg	5.21	5.21	5.21
Vapour transmission resistance	s/m	38185	38185	38185
Vapour resistivity	Sd (m)	1.01	1.01	1.01
Vapour resistance factor, $\mu$	MN s/(gm)	651	651	651

<b>Fire Performance</b>				
Reaction to fire (EN 13501-1)		A2-s1. d0	A2-s1. d0	A2-s1. d0

<b>Other properties</b>				
Category, class (EN 12467)		NT A4	NT A4	NT A4

## Impact resistance test (EAD 090062-01-0404) 8 mm + 12 mm


	Max.	Category IV	Category III	Category II	Category I
Hard body	1 Joule	Passed			
	3 Joule				
	10 Joule				
Soft body	10 Joule	Passed			Passed with ghost battens
	60 Joule				
	300 Joule				
	400 Joule	Not Passed			

\*Installation principles determine the classification, contact product compliance for further information

# Swisspearl Largo

---

## Visual Appearance

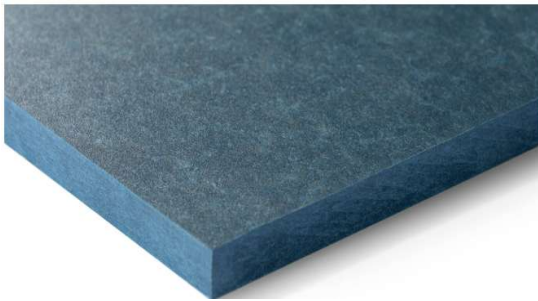


---

## Certifications

In compliance with European Regulation (EU) No. 305/2011 (Construction Products Regulation – CPR), the manufacturer provides a Declaration of Performance (DoP) for the product, confirming that it bears the CE marking. This marking indicates that the product meets the essential requirements set out in the applicable harmonized European standard. The Declaration of Performance, issued under the CPR, is available at [www.swisspearl.com](http://www.swisspearl.com)



The manufacturing facility holds the latest versions of the following ISO certificates.

- ISO 9001 Quality Management System

---

## Disclaimer

This Product Data Sheet reflects typical values based on current production. While we aim to maintain consistent quality, minor variations may occur. Please note that all values are subject to an AQL level and tolerance in accordance with EN 12467. Key performance indicators (KPIs) are monitored and reviewed annually to ensure product reliability and continuous improvement.

The information provided serves as a general guide and may be updated without notice. We recommend validating the product for your specific application before use.

The material is made from natural raw materials; therefore, each individual fibre-cement product has its own unique appearance and texture. Inclusions, impurities, and irregularities may occur, such as uneven surfaces or textures, which are part of the product's natural look and feel. Natural imperfections may be visible; however, the overall appearance of the product will be homogeneous. These characteristics do not affect the strength or durability of fibre-cement products. Over time, the appearance of fibre-cement products will change as a result of exposure to environmental factors.

The values given are typical values

\*: If any recipe or production process changes, the verification period is accordingly revised.

NA: Not applicable

NR: Not relevant