

# Swisspearl Largo


Version: 6/26

## Façade Boards

### Gravial

Gravial is a naturally dried fibre cement board with a linearly milled surface structure and a glazed coating. Gravial's linear milling creates an impressive play of light and shadow, depending on the time of day and the viewing angle. With the exception of one brown tone, the colour line ranges in soft grey tones from white to black.

The transition from light to dark in just a few steps is particularly effective due to the subtle shadows created on each panel. Gravial gives shape to dynamic, lively building envelopes.

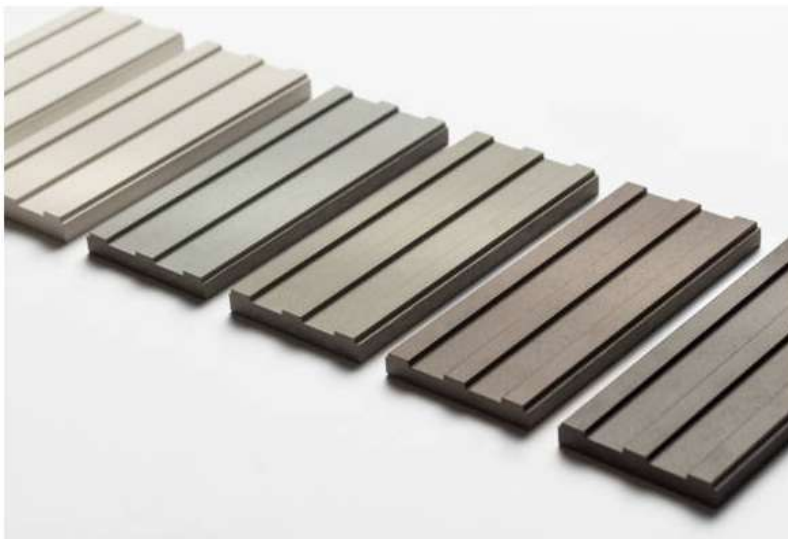

### GRAVIAL

**■** translucent pigmented

**■** linear milled

**—** coloured through\*  
or grey based

- Granite 624
- Anthracite 3020\*
- Crystal 125
- Ivory 3099\*
- Ivory 3090\*
- Amber 723



# Swisspearl Largo

	Units	9/12 mm
<b>Dimension (nominal)</b>		
Thickness	mm	9.0 / 12.0
Width	mm	1250
Length	mm	3050
<b>Dimension tolerance (EN 12467, Level 1)</b>		
Thickness (up to 20 mm)	mm	-1.20 / +1.80
Width (1000 mm < a < 1600 mm)	mm	± 0.3 % a
Length (1600 mm < a)	mm	± 5.0
a is the nominal width or length		
<b>Physical properties</b>		
Density, dry minimum (EN 12467)	Kg/m <sup>3</sup>	≥ 1550
Density, dry average (EN 12467)	Kg/m <sup>3</sup>	1800
Weight (average shipping weight)	Kg/m <sup>2</sup>	21.0
<b>Mechanical properties</b>		
<b>Bending modulus of elasticity MOE (EN 12467)</b>		
E-module Average ambient	GPa	12.0
<b>Bending strength MOR (EN 12467)</b>		
Wet average (EN 12467)	MPa	25.3
Minimum Class A4 (EN 12467)	MPa	18.0
<b>Color variation measured on the production line</b>		
CIELAB colour model	ΔE	< 2.0
<b>Color Resistance to UV (Xenon Arc light for accelerated weathering) ASTM G155</b>		
3000 hours	ΔE	< 5.0
5000 hours	ΔE	< 5.0
<b>Environmental footprint (EN 15804 ISO 14040/ ISO 14044)</b>		
GWP-total (A1-C4)	kgCO <sub>2</sub> -eq	16,7
GWP-biogenic (A1-C4)	kgCO <sub>2</sub> -eq	0,74
GWP-fossil (A1-C4)	kgCO <sub>2</sub> -eq	16,5

# Swisspearl Largo

	Units	9/12 mm
<b>Thermal properties</b>		
Coefficient of thermal expansion $\lambda_{10}$	mm/m °C	0.01
Temperature (air) in use	°C max	-40 +80
Frost resistance (100 cycles EN 12467)	RL	RL > 0,75
Thermal conductivity (ISO 8301, EN 12667) $\lambda_{10}$	W/mK	0.5
<b>Hygrothermal properties</b>		
Moisture movement (30/90% RH, EN 12467)	mm/m	1.5
Moisture movement (wet-dry-wet)	mm/m	< 5
Moisture content	%	2 - 7
<b>Water vapour transmission properties (ISO 12572)</b>		
Vapour performance	kg/m <sup>2</sup> s Pa	0.19
Vapour transmission resistance (Z-value)	GPa m <sup>2</sup> s/kg	5.21
Vapour transmission resistance	s/m	38185
Vapour resistivity	Sd (m)	1.01
Vapour resistance factor, $\mu$	MN s/(gm)	651
<b>Fire Performance</b>		
Reaction to fire (EN 13501-1)		A2-s1. d0
<b>Other properties</b>		
Category, class (EN 12467)		NT A4

## Impact resistance test (EAD 090062-01-0404) 9/12 mm

	Max.	Category IV	Category III	Category II	Category I
Hard body	1 Joule	Passed			
	3 Joule				
	10 Joule				
Soft body	10 Joule	Passed			Passed with ghost battens
	60 Joule				
	300 Joule	Not Passed			
	400 Joule				

\*Installation principles determine the classification, contact product compliance for further information

# Swisspearl Largo

---

## Visual Appearance

---



---

## Certifications

---

In compliance with European Regulation No. 305/2011 (Construction Products Regulation – CPR), the manufacturer provides a Declaration of Performance (DoP) for the product, confirming that it bears the CE marking. This marking indicates that the product meets the essential requirements set out in the relevant harmonised European standard. The Declaration of Performance issued under the CPR is available at [www.swisspearl.com](http://www.swisspearl.com)



The manufacturing facility holds the latest versions of the following ISO certificates.

- ISO 9001 Quality Management System

---

## Disclaimer

---

This Product Data Sheet reflects typical values based on current production. While we aim to maintain consistent quality, minor variations may occur. Please note that all values have an AQL level and a tolerance in relation to EN 12467. Key performance indicators (KPIs) are monitored and reviewed annually to ensure product reliability and continuous improvement. The information is provided as a general guide and may be updated without notice. We recommend validating the product for your specific application before use.

The material is made from natural raw materials, and each fibre-cement product has its own unique appearance and texture. Inclusions, impurities and irregularities may occur, such as uneven surfaces or textures, which are part of the product's natural look and feel. Natural imperfections may be visible, but the overall product appearance will remain homogeneous. The appearance does not affect the strength and durability of fibre-cement products. Over time, the appearance of fibre-cement products may change as a result of exposure to environmental factors.

The values given are typical values

\*: If any recipe or production process changes, the verification period is accordingly revised.

NA: Not applicable

NR: Not relevant