

Swisspearl Largo


Version: 6/26

Façade Boards

Zenor | Planea

Planea is a naturally dried grey fibre cement board with an opaque, durable surface coating. The matte, smooth surface enhances the clarity and intensity of the colours, making them particularly expressive. Planea can be used to create a colour-intensive building envelope that provides a striking contrast to its surroundings.

Zenor is a large-format fibre cement panel with an opaque coating. The selected colour range enables cost-effective yet high-quality implementation from production to assembly. It provides all-round protection for building envelopes with simple elegance.

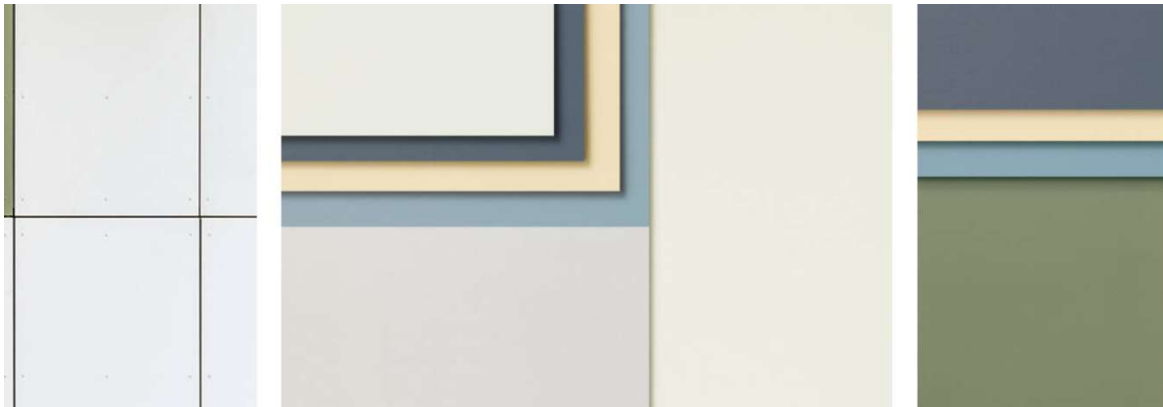

Shading

Deviations in colour shades, both within a single product and from product to product, are a natural part of the production process, highlighting the vibrant, expressive character of the material. Colour variation is measured on the production line using the CIELAB colour model.

Colour Range

Please check the local homepage for available colors.

Swisspearl Largo

	Units	6 mm	8 mm	12 mm
Dimension (nominal)				
Thickness	mm	6.0	8.0	12.0
Width	mm	1192 1250	1192 1250	1192 1250
Length	mm	2510 3050	2510 3050	2510 3050
Dimension tolerance (EN 12467, Level 1)				
Thickness (up to 20 mm)	mm	± 0.6	± 0.8	± 1.2
Width (1000 mm < a < 1600 mm)	mm	± 0,3 % a	± 0,3 % a	± 0,3 % a
Length (1600 mm < a)	mm	± 5.0	± 5.0	± 5.0
a is the nominal width or length				
Physical properties				
Density, dry minimum (EN 12467)	Kg/m ³	≥ 1550	≥ 1550	≥ 1550
Density, dry average (EN 12467)	Kg/m ³	1700	1700	1700
Weight (average shipping weight)	Kg/m ²	11.7	15.6	23.5
Mechanical properties				
Bending modulus of elasticity MOE (EN 12467)				
E-module Average ambient	GPa	12.0	12.0	12.0
Bending strength MOR (EN 12467)				
Wet average (EN 12467)	MPa	20.0	20.0	20.0
Minimum Class A4 (EN 12467)	MPa	18.0	18.0	18.0
Color variation measured on the production line				
CIELAB colour model	ΔE	< 2.0	< 2.0	< 2.0
Color Resistance to UV (Xenon Arc light for accelerated weathering) ASTM G155				
3000 hours	ΔE	< 5.0	< 5.0	< 5.0
5000 hours	ΔE	< 5.0	< 5.0	< 5.0
Environmental footprint (EN 15804 ISO 14040/ ISO 14044)				
GWP-total (A1-C4)	kgCO ₂ -eq		16,9	
GWP-biogenic (A1-C4)	kgCO ₂ -eq		0,18	
GWP-fossil (A1-C4)	kgCO ₂ -eq		16,7	

Swisspearl Largo

	Units	6 mm	8 mm	12 mm
Thermal properties				
Coefficient of thermal expansion λ_{10}	mm/m °C	0.01	0.01	0.01
Temperature (air) in use	°C max	-40 +80	-40 +80	-40 +80
Frost resistance (100 cycles EN 12467)	RL	RL > 0,75	RL > 0,75	RL > 0,75
Thermal conductivity (ISO 8301, EN 12667) λ_{10}	W/mK	0.5	0.5	0.5

Hygrothermal properties				
Moisture movement (30/90 % RH, EN 12467)	mm/m	1.5	1.5	1.5
Moisture movement (wet-dry-wet)	mm/m	< 5	< 5	< 5
Moisture content	%	2 - 7	2 - 7	2 - 7

Water vapour transmission properties (ISO 12572)				
Vapour performance	kg/m ² s Pa	0.19	0.19	0.19
Vapour transmission resistance (Z-value)	GPa m ² s/kg	5.21	5.21	5.21
Vapour transmission resistance	s/m	38185	38185	38185
Vapour resistivity	Sd (m)	1.01	1.01	1.01
Vapour resistance factor, μ	MN s/(gm)	651	651	651

Fire Performance				
Reaction to fire (EN 13501-1)		A2-s1. d0	A2-s1. d0	A2-s1. d0


Other properties				
Category, class (EN 12467)		NT A4	NT A4	NT A4

		Max.	Category IV	Category III	Category II	Category I
Hard body	1 Joule	Passed				
	3 Joule					
	10 Joule					
Soft body	10 Joule	Passed			Passed with ghost battens	
	60 Joule					
	300 Joule	Not Passed				
	400 Joule					

*Installation principles determine the classification, contact product compliance for further information

Swisspearl Largo

Visual Appearance

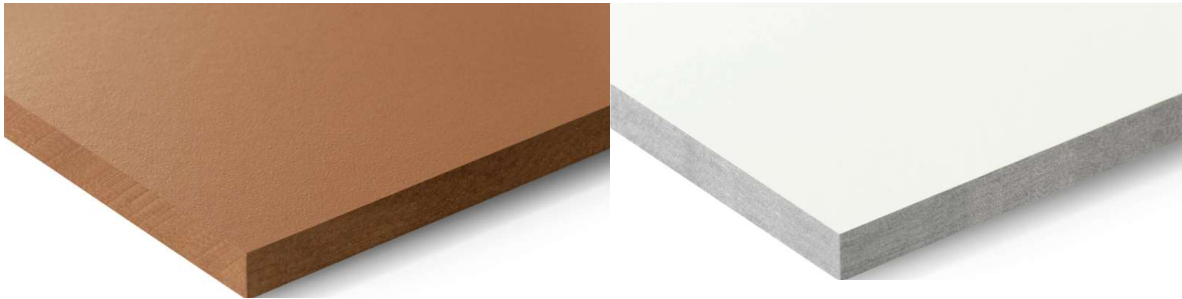

ZENOR

PLANEA

Certifications

In compliance with European Regulation No. 305/2011 (Construction Products Regulation – CPR), the manufacturer provides a Declaration of Performance (DoP) for the product, confirming that it bears the CE marking. This marking indicates that the product meets the essential requirements set out in the relevant harmonised European standard. The Declaration of Performance issued under the CPR is available at www.swisspearl.com



The manufacturing facility holds the latest versions of the following ISO certificates.

- ISO 9001 Quality Management System

Disclaimer

This Product Data Sheet reflects typical values based on current production. While we aim to maintain consistent quality, minor variations may occur. Please note that all values have an AQL level and a tolerance in relation to EN 12467. Key performance indicators (KPIs) are monitored and reviewed annually to ensure product reliability and continuous improvement. The information is provided as a general guide and may be updated without notice. We recommend validating the product for your specific application before use.

The material is made from natural raw materials, and each fibre-cement product has its own unique appearance and texture. Inclusions, impurities, and irregularities may occur, such as uneven surfaces or textures, which are part of the product's natural look and feel. Natural imperfections may be visible, but the overall product appearance remains homogeneous. The product appearance does not affect the strength or durability of fibre-cement products. Over time, the appearance of fibre-cement products may change as a result of exposure to environmental factors.

The values given are typical values

*: If any recipe or production process changes, the verification period is accordingly revised.

NA: Not applicable

NR: Not relevant